



TL-400

Deployable portable lighting in one
bespoke robust package.

Portable Light Tower



SPEEDY DEPLOYMENT


MULTIPLE LIGHTING DISTRIBUTION



Single latch to release tripod

Deploy or fold in seconds.




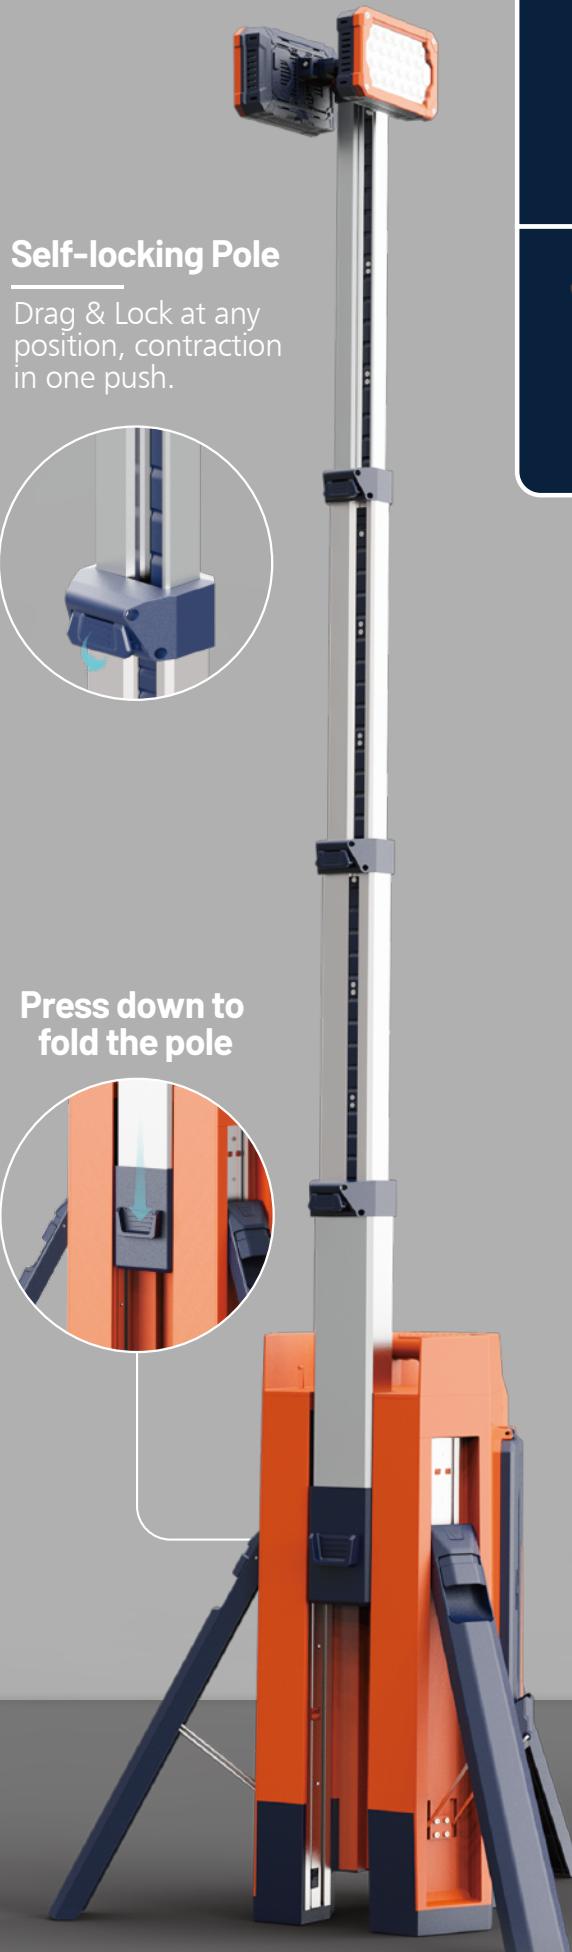


Ultra-long Endurance

Standard Mode Up To **20+** Hours
(3xD24-100)

Control Board

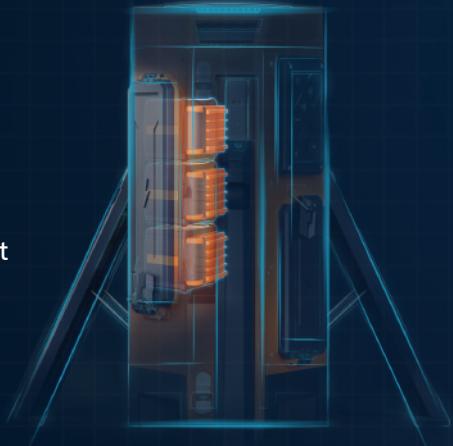


Application



AC Powered
Up To **17,000** LM

Battery-powered
Up To **10,000** LM

Brightness

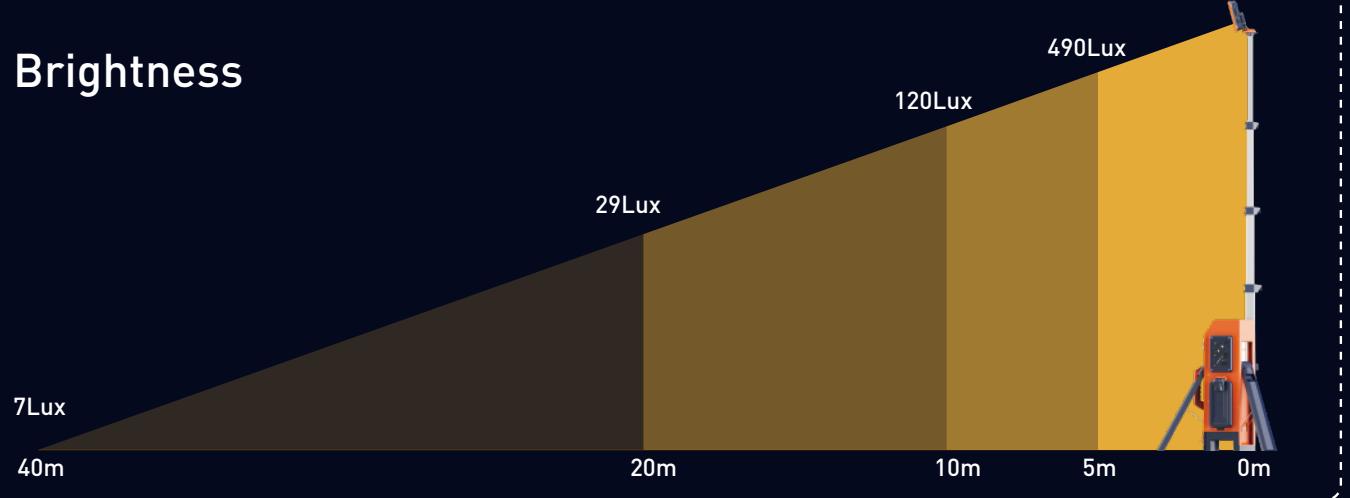

* 'Brightness' represents the center point illuminance value of the lighting direction.

AC

0-17,000LM
Stepless Dimmable

Battery (4 Mode)

Turbo	10,000LM
Standard	6,300LM
Balanced	3,800LM
Eco	1,000LM

Lighting Area
1100m²



* 'Lighting Area' represents the total lighting area of which > 1lux.

One-person Operation

Transport, deploy, adjust lighting in seconds with one operator.



Dual handle & strap available, 10Kg.



Optional Accessories



Achieve 15000LM full brightness with the driver, or operate wirelessly using a battery and charger.

Cover all possibilities with a choice of Power Options.

Battery (D24 Series)

Charger (MC-2)



Driver (XI-75-56BH)

Charger (MC-1)

9 Bay Simultaneous Rapid Charger (TKC-9)

Carry 9 battery packs, charge them for off-grid light tower operation for up to a week.



TL400 is a main light source that doubles as a USB charger for T2 headlamps, S3 flashlights, and mobile devices.

Fully equipped for any challenges in the dark!



T2 Head Light

S3 Flash Light

Specifications





TL-400

Height	64.5cm~220cm
Weight	10Kg (Fitting only)
Power Supply	Battery / AC 100-277V
Lumens	0 - 17,000Lm
Run Times	>20 hours (Standard mode, D24-100)
IP Grade	IP65
Output(USB)	5V 2A (2 Dock)
Battery System	D24-100

Battery (D24-100)

Rated Power	98Wh
Rated Voltage	24.5V
Rated Capacity	4.0Ah
Working Temperature	-10~50°C
Working Humidity	1~98%

Size (mm)

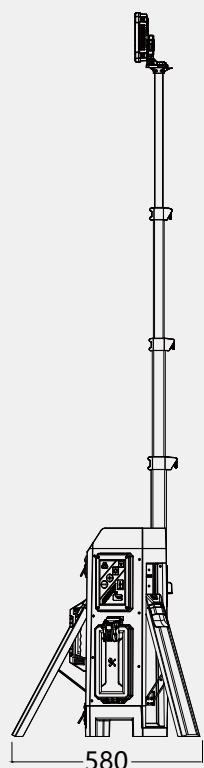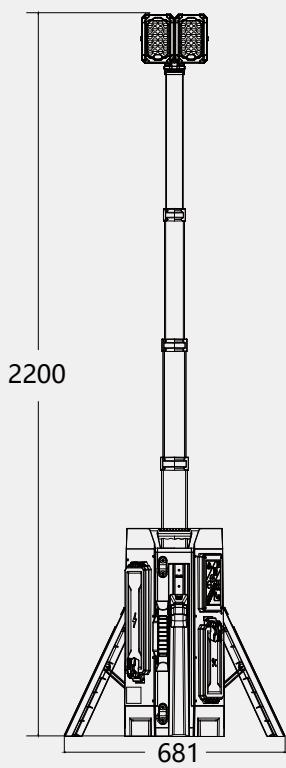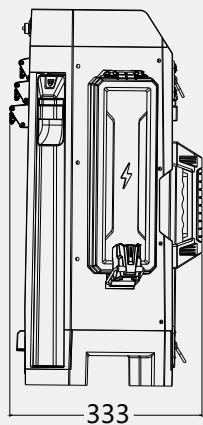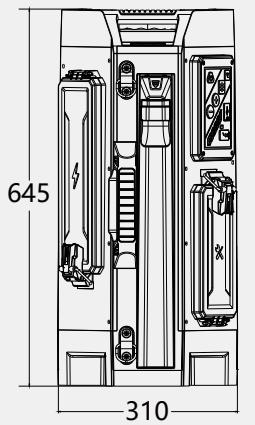

Package

Size of Carton	Gross Weight of Carton	PCS/Carton
730x390x410mm	13.3kg±5%	1

